

Unity™ Architectural Systems


- 6 Channels
- 2400 Watts per Channel
- Remote Station Capable
- DMX Input with Softpatch
- Single or Three Phase Power
- Stores 100 Programmable Scenes
- Calendar / Clock Event Scheduler
- "Snapshot" Recording of Scenes

AR-602 Wall Mount Dimmer



The AR-602 is a 6 channel x 2400 Watts per channel dimmer. It accepts DMX-512 signals and allows remote station control of preset scenes. The unit operates from either single or three phase power. The highly versatile AR-602 may utilize remote stations to activate specific user programmed scenes pre-stored in the unit. Several various remote types may be used.

TYPICAL SYSTEM DIAGRAM

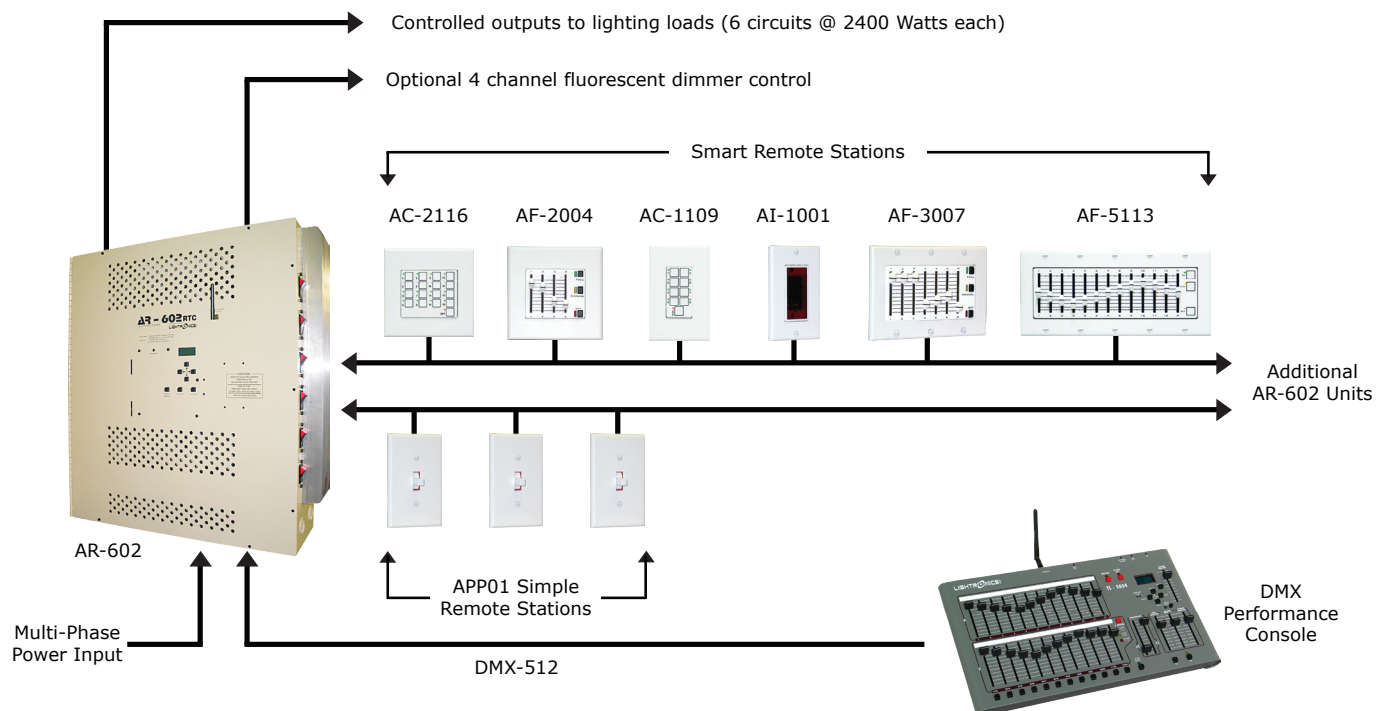

Unity™ Architectural Systems

SPECIFICATIONS

Channels / Capacity:	6 @ 2400 Watts each
Power Requirements:	120/208VAC Three Phase, 40 Amps each Leg OR 120/240VAC Single Phase, 60 Amps each Leg
Power Devices:	Dual 65 Amp SCRs
Power Connector:	Terminal Strip
Channel Output:	Terminal Strip
Circuit Breakers:	20 Amp Fast Acting
Minimum Load:	15 Watts
Curve:	Modified Square Law
Filter Rise Time:	600 Usec. Minimum
Output Function:	Dimmer or Relay Circuit Selectable
Remote Network:	RS-485, 62.5 Kbaud, Bidirectional 9 Bit Network
Control Input:	DMX-512 USITT Standard with Softpatch
Front Panel Controls:	8 Char. x 2 Line LCD Display and Keypad
Local Presets:	100 Scenes Standard, Expandable to 255 Scenes
Remote Stations:	Total of 32 Remote Stations with Unique System Addresses
Slave AR-602RTC / AR-1202RTC Units:	Up to 31 Additional AR-602 / AR-1202 Units may be Added
Size:	19"W x 21"H x 6.25"D
Weight:	50 Pounds

Architect & Engineer's Specifications

The dimming system shall have 6 circuits with a load capacity of 2400 Watts per circuit. Each circuit is protected by a 20 Amp fast acting magnetic circuit breaker. An allowance of 200% overhead capacity is employed in the circuit design. The dimming system shall have a rise time of not less than 600 microseconds. Programming setup and memory attributes are via a front panel LCD display with keypad controls. A user may program the system power setup, the dimmer attributes of Dim or Relay, Softpatch, scene memories, and unit address via the front panel display and keypad controls. The dimming system will have a minimum of 100 programmable scenes. Scenes are recalled via standard 8 momentary contact closures, and up to 32 remote stations using a RS-485 protocol. A Calendar/Clock shall allow the user to schedule 128 Events to trigger by date and time any of the 100 programmed scenes, Event scenes may be piled on. A Snapshot function uses an external control to set scenes and via the Enter button record them directly into a scene memory. An astronomical clock is set and programmed by entering in the Longitude and Latitude of the system location. The dimming shall accept external control via RS-232/485 serial data. The dimming system shall also use USITT standard DMX-512 protocol for control of the dimming circuits.

Power requirements of the dimming system shall be 120/240 VAC Single Phase or 120/208 VAC Three Phase operation. Capacity shall be 60 Amps per leg Single Phase mode, 40 Amps per leg Three Phase mode. All connections for control and electricity are made through terminal connections. Access to connections shall be through a hinged front panel. Wallmount attachments must accommodate standard 16" stud centers". Dimensions are 21" high, 20.5" wide, 6.25" deep, the weight is 50 lbs. The dimming system is covered by a 5 year factory warranty.

The dimming system shall be a Lightronics AR-602.

5 YEAR WARRANTY

The 5 year warranty is valid if the Warranty Registration card is returned to Lightronics, Inc. within 30 DAYS of the purchase date.