


PRODUCT DESCRIPTION

The AF-5013 is a twelve scene, wall mount remote control unit intended for use with the Lightronics AR-1202 Architectural dimmer. The unit fits in a standard five gang wall switch box. All power and data connections are via a 4 wire communication bus between itself and the AR-1202 dimmer.


In addition to manual fader control of twelve scenes, a master fader is provided. The master fader enables intensity control for all twelve scenes. Pushbutton switches are included to activate a blackout and full on selection. LED indicators provide status feedback.

Multiple units may be chained together to provide dimmer control from various locations. The AF-5013 may also be used with other Lightronics architectural remote stations. When used in an AR-1202 system with version 0.91 (or newer) firmware, AF-5013's on the bus may be used with different blocks of scenes or may be set to the same block.

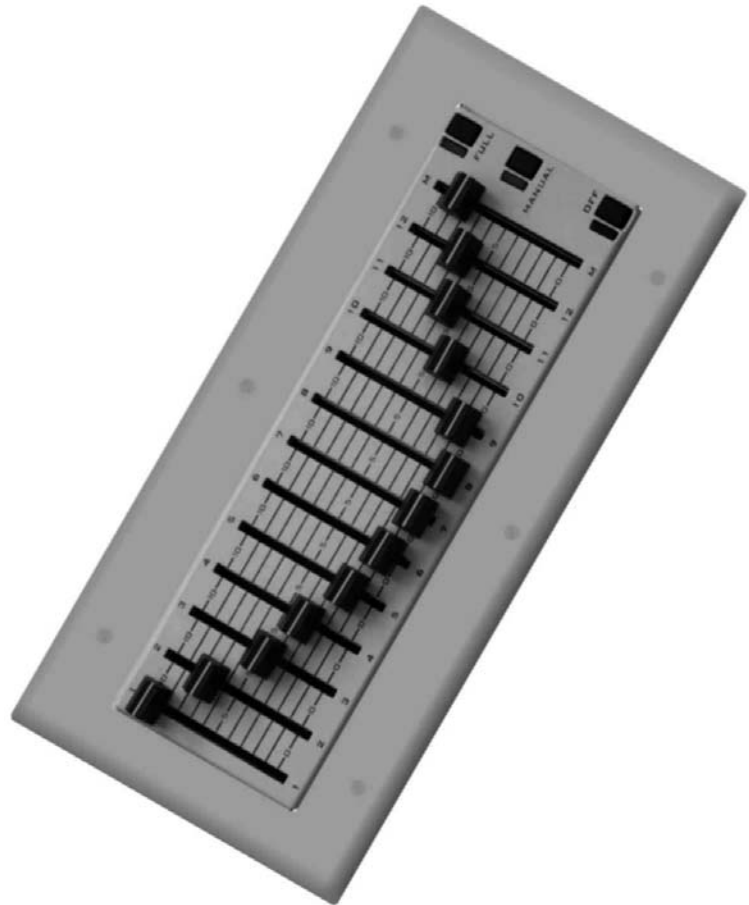

INSTALLATION

The AF-5013 connects to the AR-1202 dimmer via a shielded 4 conductor cable arranged as 2 twisted pairs. A high grade, low capacitance cable (less than 25 pf per foot) is required to assure trouble free data transmission to and from the AF-5013. One pair connects to the DATA – and DATA + signals. The other pair carries the power (Remote V+) and COMMON. The cable shield should be connected to the COMMON.

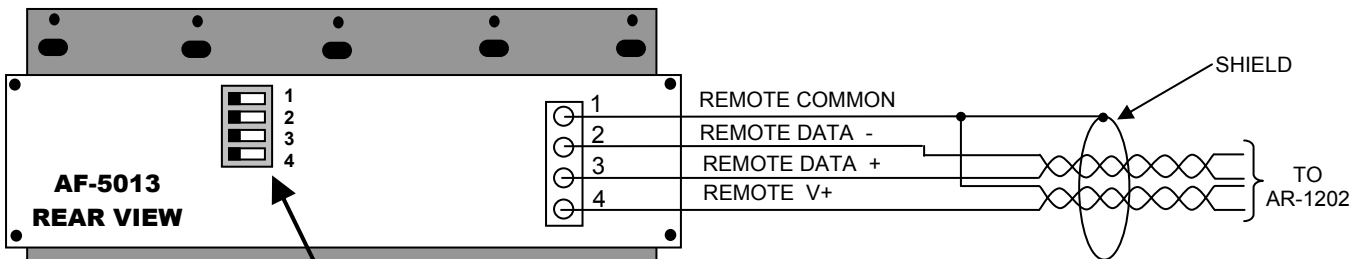

Switch #	Scenes 51- 62	Scenes 67 - 78	Scenes 83 - 94
1	←	←	←
2	←	←	←
3	←	←	→
4	←	→	←

AF-5013 ARCHITECTURAL REMOTE STATION

Version 0.70

OWNERS MANUAL

07/17/2006

CONNECTING A SINGLE UNIT: Connect the 4 cable wires to the screw down terminals in the connector on the back of the unit. See diagram above. Connect the cable shield to the REMOTE COMMON pin. The other end of the cable will connect to a terminal strip provided in the AR-1202 dimmer unit. See the AR-1202 Owners Manual for further details about connections at the AR-1202.

CONNECTING MULTIPLE UNITS: Follow the instructions above for a single unit for the first AF-5013. Connect pin 1 of the second unit to pin 1 of the first unit and continue to connect the second unit to the corresponding pin numbers on the first unit.

MULTIPLE UNITS OF DIFFERENT TYPES: The AF-5013 may be connected together with other Lightronics smart remotes. (AC-1009, AC-2016, AF-2004, AF-3007, AI-1001). These remotes all have the same connection scheme. Connect the AF-5013 to the other remotes by connecting like signal names together (REMOTE COMMON to REMOTE COMMON etc.).

ADDRESS DIP SWITCH SETTINGS

AR-1202's WITH FIRMWARE PRIOR TO VERSION 0.91: AF-5013's operate using scenes 51 thru 62. The DIP switches on the rear of the unit(s) must be set for this scene block as shown in the diagram on the previous page.

AR-1202's WITH FIRMWARE VERSION 0.91 or LATER: The AF-5013 can be set to operate the first 12 scenes within a specific block of 16 scenes which have been created and stored in the AR-1202. Scene block selection is done using the DIP switches on the rear of the AF-5013. If multiple AF-5013's are used, they may be set independently to operate within different scene blocks. Multiple units may also operate within the same scene block. The first available scene block for the AF-5013 scenes starts at scene 51. The diagram on the first page contains a table which shows the switch positions for selecting scene blocks.

OPERATION

No setup or turn on procedure is needed. When the AR-1202 unit is powered the AF-5013 will also be activated.

The scenes activated by the AF-5013 must be created and stored in the AR-1202 prior to use. See the AR-1202 owners manual for detailed instructions for creating and storing scenes. Scene numbers proceed from left to right at the AF-5013.

The MANUAL button enables the faders to raise and lower scenes.

The intensity of each scene is affected by the position of the Master Fader (the right end fader). If the master fader is all the way down then no scenes will be visible even though the faders for those scenes are raised.

With respect to channel intensities, the AF-5013 faders operate in a "highest of " manner. This means that a channel will run at the level for the scene which has the highest intensity for that channel.

The OFF button causes all AR-1202 scenes to be blacked out (turned off).

The ON button causes all twelve scenes (51 - 62) to be fully activated (turned on).

MAINTENANCE AND REPAIR

There are no user servicable parts in the AF-5013. Internal service on the unit by other than Lightronics authorized agents will void the warranty.

If service is needed, contact the dealer from whom you purchased the unit or contact the Lightronics Service Dept..



LIGHTRONICS INC. **WARRANTY** LIGHTRONICS INC.

All Lightronics products are warranted for a period of TWO/FIVE YEARS from the date of purchase against defects in materials and workmanship.

This warranty is subject to the following restrictions and conditions:

- A) If service is required, you may be asked to provide proof of purchase from an authorized Lightronics dealer.
- B) The FIVE YEAR WARRANTY is only valid if the warranty card is returned to Lightronics accompanied with a copy of the original receipt of purchase within 30 DAYS of the purchase date, if not then the TWO YEAR WARRANTY applies. Warranty is valid only for the original purchaser of the unit.
- C) This warranty does not apply to damage resulting from abuse, misuse, accidents, shipping, and repairs or modifications by anyone other than an authorized Lightronics service representative.
- D) This warranty is void if the serial number is removed, altered or defaced.
- E) This warranty does not cover loss or damage, direct or indirect arising from the use or inability to use this product.
- F) Lightronics reserves the right to make any changes, modifications, or updates as deemed appropriate by Lightronics to products returned for service. Such changes may be made without prior notification to the user and without incurring any responsibility or liability for modifications or changes to equipment previously supplied. Lightronics is not responsible for supplying new equipment in accordance with any earlier specifications.
- G) This warranty is the only warranty either expressed, implied, or statutory, upon which the equipment is purchased. No representatives, dealers or any of their agents are authorized to make any warranties, guarantees, or representations other than expressly stated herein.
- H) This warranty does not cover the cost of shipping products to or from Lightronics for service.
- I) Lightronics Inc. reserves the right to make changes as deemed necessary to this warranty without prior notification.

